


2206D-E13TAG

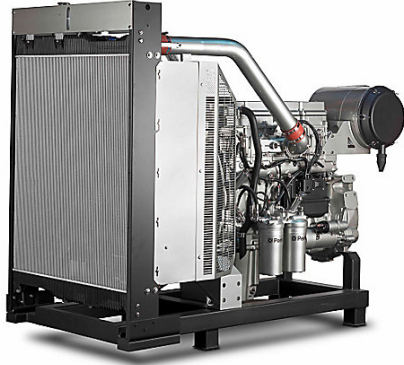

General

Bore	130.0 mm
Stroke	157.0 mm
Displacement	12.5 litres
Aspiration	Turbocharged and air-to-air charge cooled
Rotation (from flywheel end)	Anti clockwise
Number of cylinders	6 inline
Cycle	4 stroke
Compression ratio	16.3:1
Combustion system	Direct injection
Cooling system	Liquid
Total cooling capacity	51.4 litres
Total lubricating capacity	40.0 litres

Engine Dimensions *

Length	2410.0 mm
Width	1120.0 mm
Height	1725.0 mm
Dry weight	1478.0 kg

* Final dimensions dependent on selected options

Emissions Standards

Emissions	EU Stage IIIA/U.S. EPA Tier 3
-----------	-------------------------------

Power Rating

Mechanical output **	349-435 kWm
Electrical output **	400-500 kVA (320-400 kW _e)
Rated speed	1800 rpm

** ESE (1800 rpm) only - Emergency Stationary Equipment

Website: www.pps-bv.nl